REFRIGERATOR MANUFACTURER
Turbo air

S-Series
Reach-In Bottom Mount

SR-23
SF-23



SR-49
SF-49



FEATURES & BENEFIT

Digital Temperature Control System
Provides precise and constant temperature. This level of precision allows food products to remain fresh over an extended period of time.

High-Tech Monitor
The unit will beep if the door has been opened for more than 30 seconds. The monitor digitally displays the present temperature and current status of the refrigerator. You can easily change the temperature by adjusting the thermostat.

Left Hinged Model Available

Efficient Refrigeration System
Turbo Air's solid door refrigerators are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.

Automatic Evaporator Fan Motor Delays
Through stopping the evaporator fan when the refrigerator door opens, the circulation of hot, moist air into the refrigerator is prevented. This increases energy efficiency and lengthens the life of the compressor.

High-Density Polyurethane Insulation
The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

Ergonomically Designed Doors
Customers' fatigue fades away with easy grip handles and doors that open effortlessly. Self-closing and stay open door features make this the ultimate choice in customer convenience.

Magnetic Door Gaskets
Magnetic door gaskets are of one piece construction, removable without tools for ease of cleaning and replacement.


Bottom Mount Compressor Units
Turbo Air's bottom mount compressor allows easier access for service and extra storage space above. In addition, the lower area provides a cooler and less greasy operating environment which results in reduced compressor running time.

ISO14001


REFRIGERATOR MANUFACTURER
Turbo air

S-Series
Reach-In Bottom Mount

SR-23/SF-23

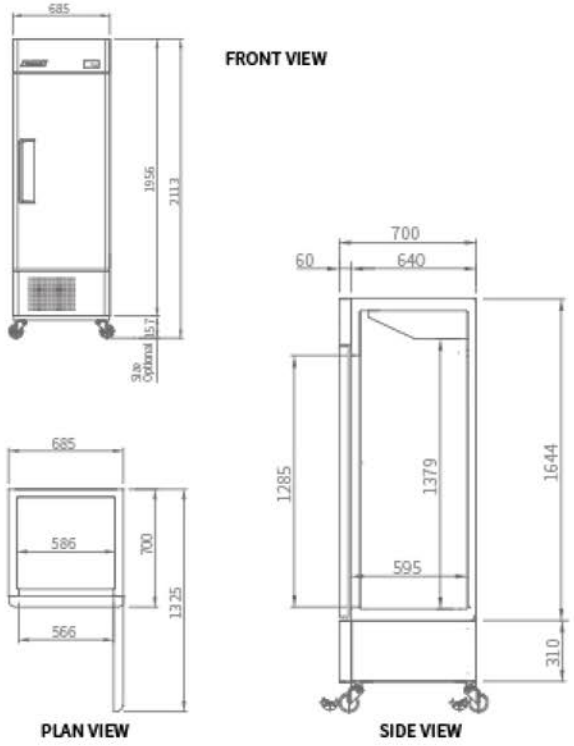

SR-49/SF-49

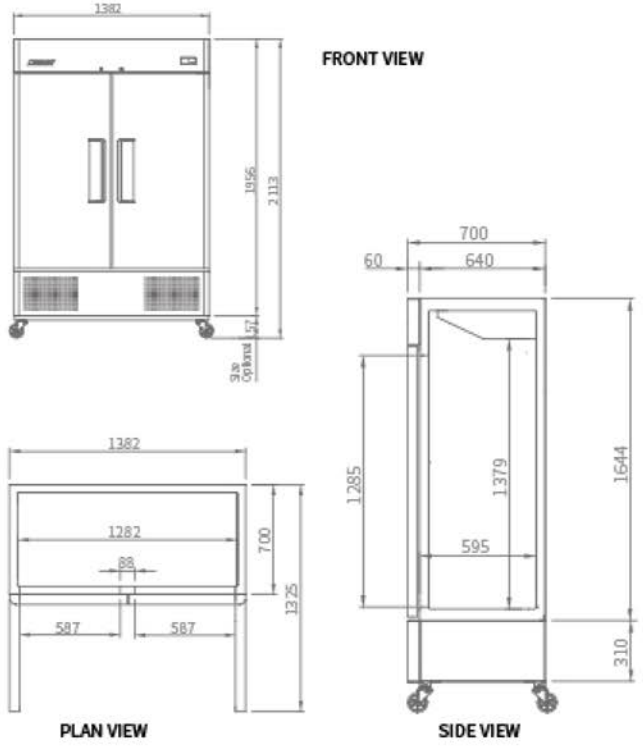

SPEC SHEET

	SR-23	SR-49	SF-23	SF-49
Classification	Refrigerator	Refrigerator	Freezer	Freezer
Cabinet dimension (W X D X H mm)	685 X 700 X 2113	1382 X 700 X 2113	685 X 700 X 2113	1382 X 700 X 2113
Capacity(Liters)	522	1148	522	1148
Inner Temperature)	1℃~8℃	1℃~8℃	-13℃~-21℃	-13℃~-21℃
Door	1	2	1	2
# of Shelves	3	6	3	6
Refrigeant	R134A	R134A	R404A	R404A
Compressor(HP)	1/4	1/3	1/2	3/4
Cooling Type	Fan	Fan	Fan	Fan
Insulation Type	Polyurethane Non CFC			
Temperature Control Type	Digtal AUTO CONTROL			
Amps(A)	2.5	3	4	5
Voltage(V / HZ/PH)	220 / 50 / 1	220 / 50 / 1	220 / 50 / 1	220 / 50 / 1
Power(W)	236	297	497	564
Weight(Kg)	120	190	120	190